

Safety gloves against mechanical risks

Manufacturer

UVEX SAFETY Gloves GmbH & Co. KG
Elso-Klöver-Str. 6, 21337 Lüneburg
Postfach 24 47 · 21314 Lüneburg
GERMANY

Tel.: +49 4131 9502-0
Fax: +49 4131 84338
Email: gloves@uvex.de
Website: uvex-safety.de

Type uvex phynomic allround
Basic glove material polyamide/elastane
Available sizes 5, 6, 7, 8, 9, 10, 11, 12


Coating material Aqua-polymer foam coating
Smallest packing unit 100 Pairs

Pictogram and performance levels

EN 388 : 2003



3 1 3 1 **Performance levels**

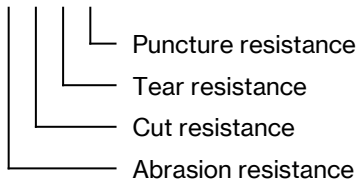

Pictogram and performance levels according to EN 388:2003 (highest performance level: 4/cut resistance: 5)

All levels only apply to the coated areas of the glove.

The overall classification of gloves with two or more unconnected layers does not necessarily denote the performance level of the outer layer.

The noticeable difference in wearer comfort: combination of high sensitivity and tactile feel, lightness. The uvex phynomic airLite C ESD is certified according to the DIN EN 16350:2014 (1149-2) standard and is also tested based on the DIN EN 1149-1.

EC notified body

No.:

Cleaning

Storage

Store in a dark, dry place.

Handling

New and used gloves should be thoroughly checked. Particularly after cleaning, ensure that they are not damaged (e.g. incisions, holes).

The noticeable difference in wearer comfort: combination of high sensitivity and tactile feel, lightness. The uvex phynomic airLite C ESD is certified according to the DIN EN 16350:2014 (1149-2) standard and is also tested based on the DIN EN 1149-1. Therefore it is perfectly applicable in ESD areas and areas

We are not aware of any substances in this product that could cause an allergic reaction.

Disposal

The gloves should be disposed of properly as household waste. If they come into contact with chemicals, please consult the chemical manufacturer's waste disposal guidelines.

Warning

Gloves should not be worn where there is a risk of being caught in moving machinery parts.