

Information User instruction

Safety gloves against thermic and mechanical risks

Manufacturer

UVEX SAFETY Gloves GmbH & Co. KG
Elso-Klöver-Str. 6, 21337 Lüneburg
Postfach 24 47 · 21314 Lüneburg
GERMANY

Tel.: +49 4131 9502-0
Fax: +49 4131 84338
Email: gloves@uvex.de
Website: uvex-safety.de

Type uvex unilite thermo HD
Basic glove material cotton terry/acrylic (inner), nylon (outer)
Available sizes 8, 9, 10, 11


Coating material PVC grip coating
Smallest packing unit 100 Pairs

Pictogram and performance levels

EN 511 : 2006



1 2 X **Performance levels**



Watertightness


Contact cold

Convective cold

EN 388 : 2003



3 2 3 1 **Performance levels**

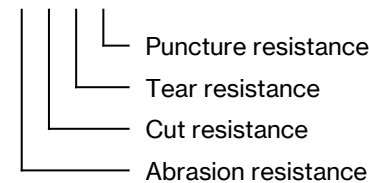

Puncture resistance

Tear resistance

Cut resistance

Abrasion resistance

Please note: The actual period of protection on the job is affected by many factors (temperature, abrasion, etc.) and can therefore differ from the performance level!

N.B.: If these gloves do not pass performance level 1 in the test for the watertightness, the insulating property of these gloves may be impaired if they become wet.

Pictogram and performance levels according to EN 388:2003 (highest performance level: 4/cut resistance: 5)

All levels only apply to the coated areas of the glove.

For gloves that consist of several parts which are not permanently connected, the performance level and protective function only applies for the complete glove with all its parts.

EC notified body SATRA Technology Centre
Wyndham Way, Telford Way, Kettering · NN16 8SD Northamptonshire, United Kingdom
No.: 0321

Cleaning No cleaning or care recommended

Storage Store in a dark, dry place.

Handling New and used gloves should be thoroughly checked. Particularly after cleaning, ensure that they are not damaged (e.g. incisions, holes).
The noticeable difference in wearer comfort: combination of high sensitivity and tactile feel, lightness. The uvex phynomic airLite C ESD is certified according to the DIN EN 16350:2014 (1149-2) standard and is also tested based on the DIN EN 1149-1. Therefore it is perfectly applicable in ESD areas and areas exposed to explosion hazards. You will be equipped for the future with the uvex phynomic airLite C ESD.

We are not aware of any substances in this product that could cause an allergic reaction.

Disposal The gloves should be disposed of properly as household waste. If they come into contact with chemicals, please consult the chemical manufacturer's waste disposal guidelines.

Warning Gloves should not be worn where there is a risk of being caught in moving machinery parts.